

Enclosures **PushButton Series**

## Polycarbonate Enclosure 5 x 3 x 3 Inches Push Button Series 2 Hole 30 mm with Opaque Lift Off Cover



**Catalog Number** CFPC2PB

**UPC** 785928564604


### DESCRIPTION

5H x 3W x 3D Inches Push Button Series Polycarbonate Enclosure is an in-line enclosure designed to be a true push button station and houses pushbuttons, switches and pilot lights in 30mm configurations. Designed for general electrical and electronic applications or any application that has associated environmental concerns. Custom hole configurations available upon request.

### APPLICATION

- For use in many MRO and OEM applications
- Slim design allows easy installation of pushbuttons and switches in machine control applications with tight or dense space requirements
- Used in compact or portable control systems or for use as an Operator Interface Enclosure in both indoor and outdoor environments
- Used as general Junction Enclosures or termination point enclosures in an electrical system
- Used indoors or outdoors

### FEATURES

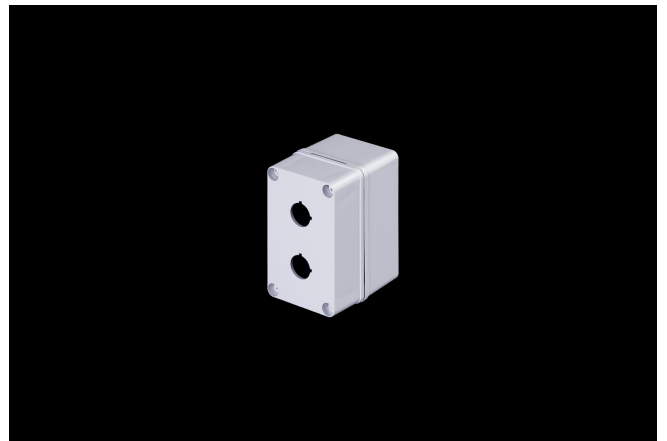

- Memory retaining continuous polyurethane gasket
- Captive polymer cover screws
- Corrosion resistant polycarbonate
- Submersible; non corrosive; environmental design
- High Impact Resistance

## General Information

Color	Gray
Cover Type	Push Button
Mounting Type	Wall Mount
Material	Polycarbonate
Cover Screw Size	Custom
Cover Screw Recommended Torque	16-20 in-lbs
Cover Screw Material	Polycarbonate
Installation Mounting Torque	25-30 in-lbs Max
Metal Inserts	
Gasket Material	Poured In Place (PIP) Polyurethane Seamless
Country of Origin	USA

## DIMENSIONS

Height (in)	5.0
Width (in)	3.0
Depth (in)	3.0
Height (mm)	127.0
Width (mm)	76.2
Depth (mm)	76.2
Usable Depth (in)	3.3
Usable Depth (mm)	83.0

## STANDARDS

---

NEMA 10250; UL 50; UL 50e; UL508A	cULus Listed File #E319779
--------------------------------------	----------------------------

CSA Std. C22.2	cULus Listed File #E319779
----------------	----------------------------

Type	1; 3R; 4; 4X; 6P; 12
------	----------------------

IEC 60529; UL Listed #E362920	IP66; IP68
-------------------------------	------------

Temperature Range °F	-40°F to +248°F
----------------------	-----------------

Temperature Range °C	-40°C to +120°C
----------------------	-----------------

Flammability Rating	UL94-5VA
---------------------	----------

Outdoor Exposure UL746c	(f1) Rated
-------------------------	------------

CE	Certified
----	-----------