

Enclosures **New Sentry Series**

## PVC Enclosure 12 x 12 x 6 Inches New Sentry Series with Opaque Lift Off Cover



**Catalog Number** J12126PVC

**UPC** 785928501005

### DESCRIPTION


12H x 12W x 6D Inches New Sentry Series PVC Enclosures corrosion resistant, watertight PVC enclosures featuring simple screw down covers. Each enclosure is assembled with a PVC gasket and a screwdown lift-off cover and 4 captive brass cover screws.

### APPLICATION

- Designed for general electrical; electronic applications; and any application that has associated environmental concerns
- Thermoplastic PVC junction enclosure designed for general purpose and industrial applications; including outdoor landscaping; agricultural; marinas; car washes; and residential.
- Well-suited for extremely wet applications and corrosive environments both indoor and outdoor
- Small footprint and extra deep features allow use in tight or dense spaces

### FEATURES

- Corrosion resistant PVC material
- Memory retaining seamless PVC gasket

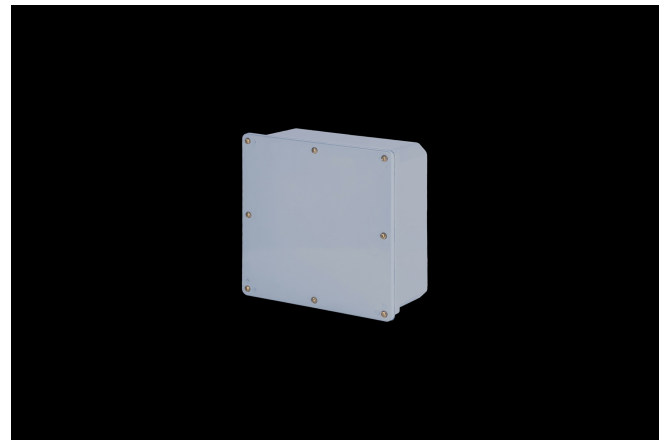

- Threaded inserts and captive brass cover screws
- Corrosion resistant PVC material
- Integral mounting feet available on some models

## General Information

|                                |               |
|--------------------------------|---------------|
| Color                          | Gray          |
| Cover Type                     | Opaque        |
| Mounting Type                  | Wall Mount    |
| Material                       | PVC           |
| Back Panel Screw Size          |               |
| Cover Screw Size               | #8-32         |
| Cover Screw Recommended Torque | 16-20 in-lbs  |
| Cover Screw Material           | Brass         |
| Mounting Foot Screw Size       | 1/4-15 Hi-Lo  |
| Installation Mounting Torque   | 40 in-lbs Max |
| Metal Inserts                  | Brass         |
| Gasket Material                | PVC Seamless  |
| Country of Origin              | USA           |

## DIMENSIONS

|                   |       |
|-------------------|-------|
| Height (in)       | 12.9  |
| Width (in)        | 12.9  |
| Depth (in)        | 6.6   |
| Height (mm)       | 328.7 |
| Width (mm)        | 328.7 |
| Depth (mm)        | 168.7 |
| Usable Depth (in) | 6.0   |
| Usable Depth (mm) | 152.0 |

## STANDARDS

---

NEMA 10250; UL 50; UL 50e; UL Listed File #E190960  
UL508A

CSA Std. C22.2 File 207025

Type 1; 2; 3; 4; 4X; 12; 13

Temperature Range °F -4°F to +140°F

Temperature Range °C -20°C to +60°C

Flammability Rating UL94-V0

Outdoor Exposure UL746c (f1) Rated