

Enclosures **New Sentry Series**

## PVC Enclosure 8 x 8 x 4 Inches New Sentry Series with Opaque Lift Off Cover



**Catalog Number** J884PVC

**UPC** 785928500701

### DESCRIPTION



8H x 8W x 4D Inches New Sentry Series PVC Enclosures are corrosion resistant, watertight PVC enclosures featuring simple screw down covers. Each enclosure is assembled with a PVC gasket and a screwdown lift-off cover and 4 captive brass cover screws.

### APPLICATION

- Designed for general electrical; electronic applications; and any application that has associated environmental concerns
- Thermoplastic PVC junction enclosure designed for general purpose and industrial applications; including outdoor landscaping; agricultural; marinas; car washes; and residential.
- Well-suited for extremely wet applications and corrosive environments both indoor and outdoor
- Small footprint and extra deep features allow use in tight or dense spaces

### FEATURES

- Corrosion resistant PVC material
- Memory retaining seamless PVC gasket

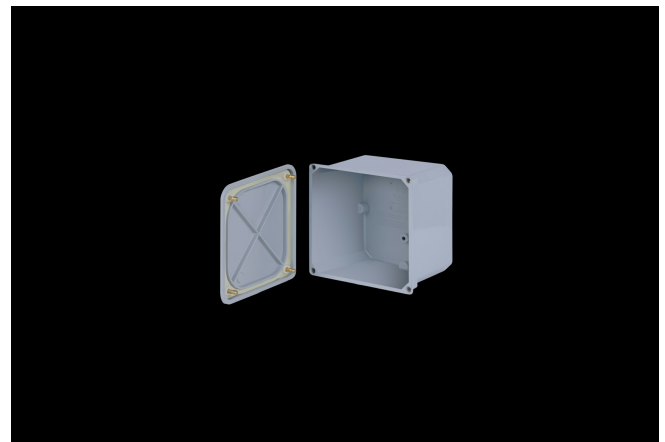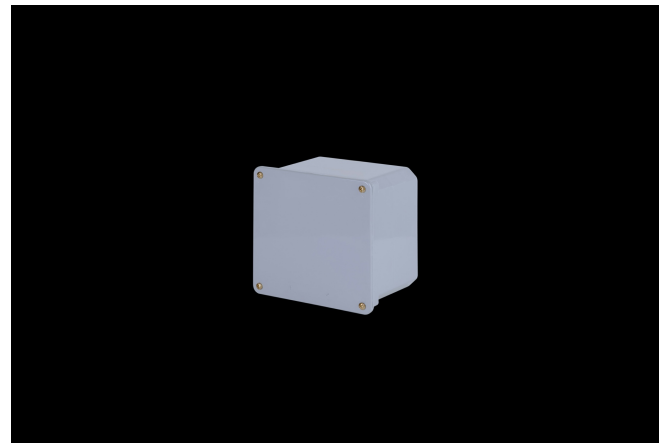

- Threaded inserts and captive brass cover screws
- Corrosion resistant PVC material
- Integral mounting feet available on some models

## General Information

Color	Gray
Cover Type	Opaque
Mounting Type	Wall Mount
Material	PVC
Back Panel Screw Size	
Cover Screw Size	#8-32
Cover Screw Recommended Torque	16-20 in-lbs
Cover Screw Material	Brass
Mounting Foot Screw Size	1/4-15 Hi-Lo
Installation Mounting Torque	40 in-lbs Max
Metal Inserts	Brass
Gasket Material	PVC Seamless
Country of Origin	USA

## DIMENSIONS

Height (in)	9.0
Width (in)	9.0
Depth (in)	4.6
Height (mm)	227.6
Width (mm)	227.6
Depth (mm)	117.3
Usable Depth (in)	4.1
Usable Depth (mm)	103.0

## STANDARDS

---

NEMA 10250; UL 50; UL 50e; UL Listed File #E190960  
UL508A

CSA Std. C22.2 File 207025

Type 1; 2; 3; 4; 4X; 12; 13

Temperature Range °F -4°F to +140°F

Temperature Range °C -20°C to +60°C

Flammability Rating UL94-V0

Outdoor Exposure UL746c (f1) Rated